

# Test Jacks 2 mm System



**Type**

**MKU 1**

2mm mini Adapter, tin plated Copper-Beryllium contact spring with solder terminal. Flexible, shatter-proof insulation sleeve, max. connecting lead diameter 2mm.

Pin Diameter

2 mm

**PART NO. / Housing color**

- 930320100
- 930320101
- 930320102
- 930320103
- 930320104
- 930320107



**MBI 1 / MBI 1 Au**

2mm panel mount mini test jack, tin/ gold plated Copper-Beryllium contact spring with solder terminal. Installation in equipment chassis and switch panels, max. wall thickness 5mm.

2 mm

**Nickel Plated**

- 930308100
- 930308101
- 930308102
- 930308103
- 930308104
- 930308106

**Gold Plated**

- 930308700
- 930308701
- 930308702
- 930308703
- 930308704
- 930308706

**Technical Data**

Contact Type spring-loaded jack Ø 2 mm  
 Connection Type solder terminal max Ø 2 mm  
 Voltage Rating 30 VAC / 60 VDC  
 Measurement Category (IEC61010) CAT I  
 Current Rating\* 6 A  
 Contact Resistance 6 mOhm  
 Mounting Type -

**Material Specifications**

Jack Body -  
 Contact Spring tin plated copper-beryllium  
 Housing PVC-P

**Environmental Conditions**

Temperature Range -20°C to +60 °C (-4 to 140°F)

**Flamability Rating**

Housing -

spring-loaded jack Ø 2 mm

solder terminal  
 30 VAC / 60 VDC  
 CAT I  
 6 A  
 6 mOhm  
 screw thread M5



-  
 tin plated copper-beryllium | gold plated copper-beryllium  
 Polyamide

-20°C to +60 °C (-4 to 140°F)

UL 94 HB

**Drawing**

Measurements are shown in millimeters.  
 Multiply by 0.03937 to convert to inches.

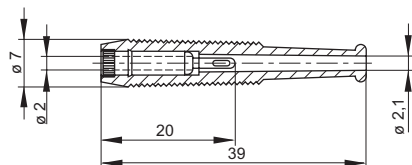

\* Please consider derating graph on page 80.