
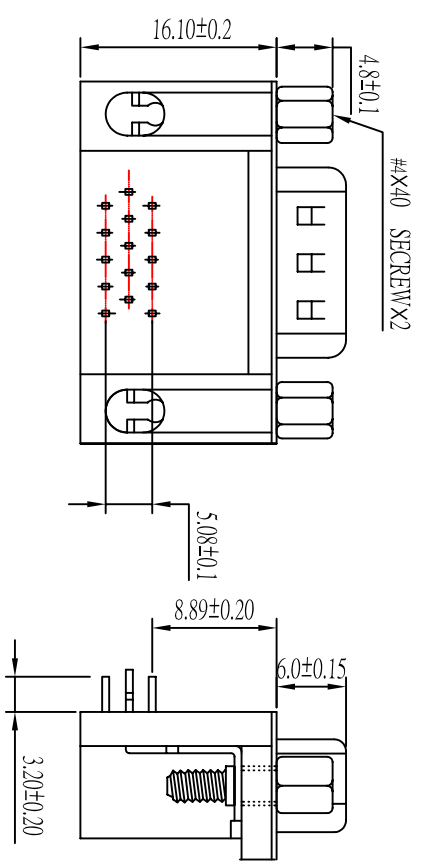
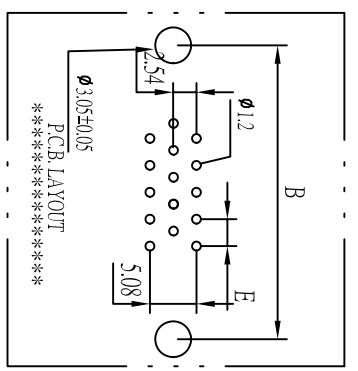


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

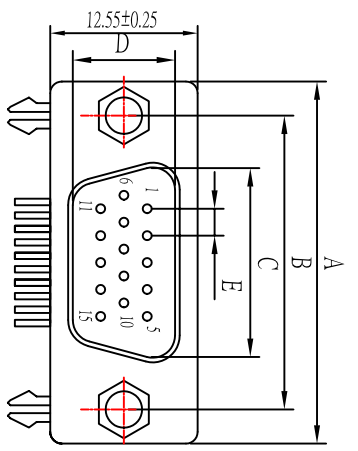

1	F Type	2	R Type	3	RF Type

- Note:
1. Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
 - 1.2 Contact: Copper alloy,t=0.20mm.
 - 1.3 Shell: Cold rolled steel,t=0.40mm.

2. Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 2.3 Contact resistance: 30 mΩ Max.
 - 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
 - 2.5 Total mating force: 8.0 Kgf Max.
 - 2.6 Total unmating force: 1.5 Kgf Min.
 - 2.7 Temperature range: -55°C~+105°C

3. Finishes:
- 3.1 contacts: All gold plated.
 - 3.2 Shell: Nickel, tin, zinc plated

No	Name	Qty	Material	Remarks & Thickness	Finish
5	Skew	2	Copper alloy	4.75*11.80mm	Nickel, Tin Plated
4	"Z" type board lock	2	Copper alloy	T=0.50mm	Tin Plated
3	Front-shell	1	Cold rolled steel	T=0.40mm	Nickel Plated
2	Contact	15-62	Copper alloy	T=0.20mm	Gold Flashed, All Gold
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/Black

PART NO:		MATERIAL:		PART NAME:	
MODEL NO:		FINIS		HDD RIGHT ANGLE P.B.C TYPE (A) 插接 NUT	
UNIT: mm	SIZE: A4	COLOR:		DWG NO:	
TOLERANCE UNSPECIFIED		DR: <i>Oyhtseu</i>		SCALE: 2-1	
x ±0.3	±0.20	CHK: <i>Nick</i>		SHEET: 1 of 1	
.xxx ±0.100	±1	APP: <i>Sevd</i>		REV: A0	
ANG:		APP: <i>Sevd</i>		REV: A0	
		0208617		0208617	